ORDERING INFORMATION

Sample Number: EPH-G8-HV-N-PC-BLK-IP

Product Line	Model	Voltage	Optics	LED	Fixture Color	Controls
EPH=Ephesus	**G8**=Lumadapt 8	**HV**=High voltage **LV**= Low voltage	**N**=Narrow **W**=Wide	**PC**=Color tunable white & RGBA	**BLK**=Black **WHT**=White	**IP**=IP

SPECIFICATION AND PERFORMANCE DATA

	LUMADAPT 8
Lumen output	up to 50,000 lumens
Input wattage / power supply output wattage	440 watts / 400 watts
Input voltage (high voltage)	277-480VAC, 50/60 Hz
Input voltage (low voltage)	120-240VAC, 50/60 Hz
CCT Range [5]	5000K nominal (3000K-6500K optional)
Color lighting	Integrated RGBA
Lumen Output by Color [5]	
Red	325
Green	1950
Blue	277
Amber	1395
CRI [5]	>/= 85 CRI
TLCI [5]	>70 TLCI (2)
Dimming range	Full range; 1-100%
Beam angle	NEMA 4 nominal (3-5 optional)
Operating temperature range	-40 degrees C to +50 degrees C
Usage	Indoor/outdoor
Mounting options (3G rated)	Pendant, yo
Mounting angle	360 degrees / f range
Electrical certifications	UL 0, UL 159
NEMA rating	A 4X
Surge	10kV mmon mod kV d nti ode
Effective Projected Area	1.4 q
Approximate Weight	28 lbs (3)

NOTES:
1. For proper functionality, Lumadapt 8 fixtures must be sold with o Lumad ystem omponents.
2. Higher TLCI fixtures available upon request.
3. Mounting options and hardware may vary a ect in ture w
4. Specifications are subject to cha e with notice.
5. Val %

Preliminary

DIMENSION

Yoke Mount

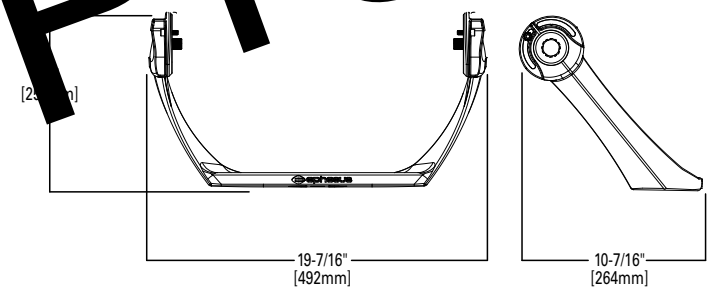

Pendant Mount

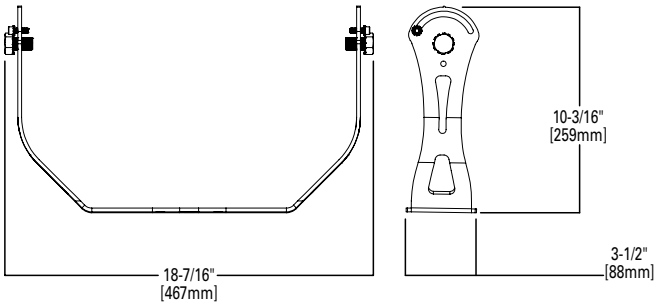

ORDERING INFORMATION FOR REQUIRED MOUNTING OPTIONS AND ACCESSORIES

Product Line	Model	Fixture Color	Mounting and Junction Box Connection	Power Cable	Packaging
EPH=Ephesus	**G8**=Lumadapt 8	**BLK**=Black **WHT**=White	**PG**=Pendant mount with cord grip **PC**=Pendant mount with conduit fitting **YG**=Yoke mount with cord grip **YC**=Yoke mount with conduit fitting	**NPC**=No power cable **C10**=10' cable	**BP**=Bulk Packaging [1]

NOTES:
1. Six items come in each bulk package.
2. Junction box not shown. Ordering fixtures without accessories and junction box will result in loss of NEMA 4X rating.