

- * Compact appearance design for more flexible application.
- * Stainless steel screw mounted to standard junction boxes.
- * Stable LEDs with low decay, equipped with high quality driver, in 100lm/w.
- * Die-cast aluminum lamp body with texture backside, larger the ventilation area, with good heat dissipation.
- * Superior optical design, flat lens and drop lens for selection, makes the lamp in high brightness and evenly light distributing.
- * IP 65 waterproof rate for wet and damp location.
- * 2 years Warranty.
- * 10KV high voltage surge protection.
- * UL/cUL/DLC/CE/RoHS/LM79/LM80/IES for quality assurance and safe operation.
























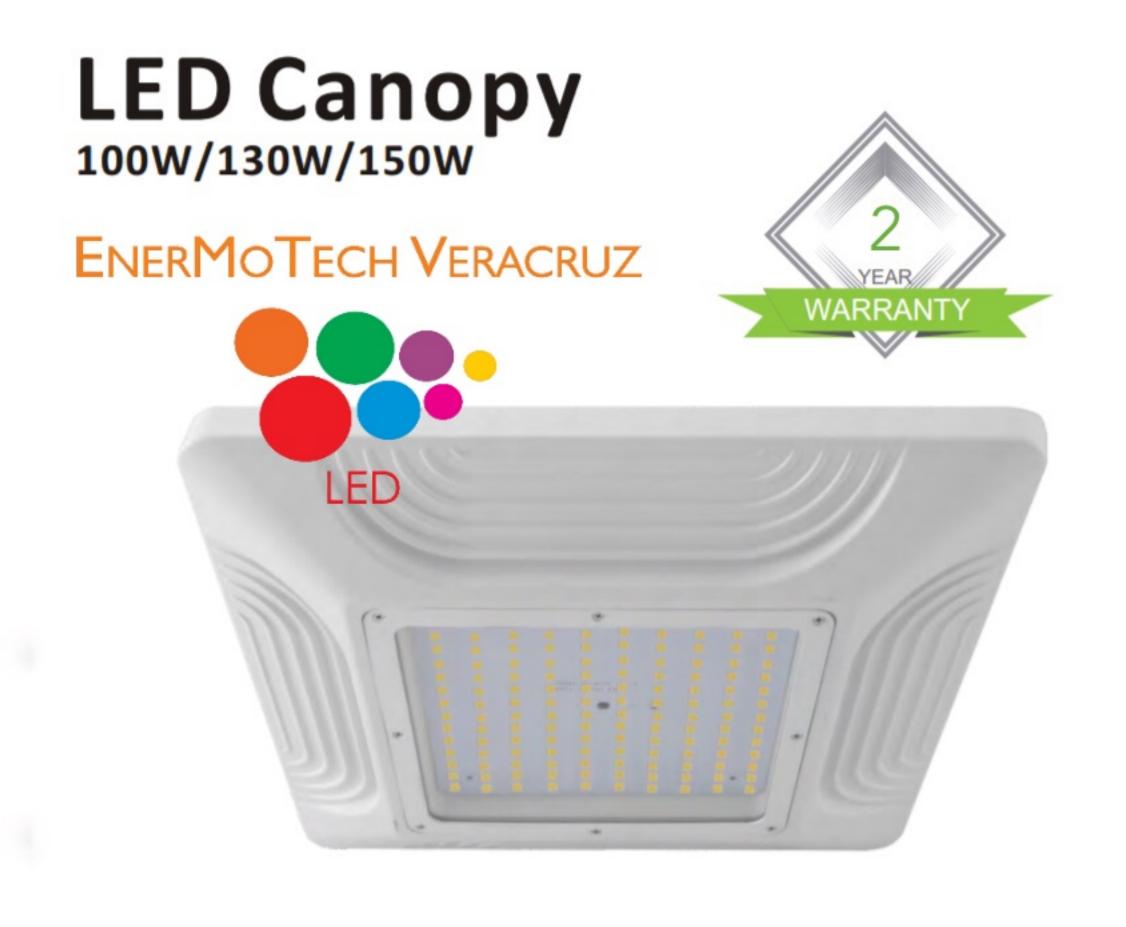



Features:

- Compact appearance design for more flexible application.
- Stainless steel screw mounted to standard junction boxes.
- Stable LEDs with low decay, equipped with high quality driver, in 100lm/w.
- Die-cast aluminum lamp body with texture backside, larger the ventilation area, with good heat dissipation.
- Superior optical design, flat lens and drop lens for selection, makes the lamp in high brightness and evenly light distributing.
- IP 65 waterproof rate for wet and damp location.
- 5 years Warranty.
- 10KV high voltage surge protection.

Application:

Widely used in parking facilities, shopping area walkways, warehouse, stairway security light, pathway lighting or underpasses.

Specifications:

Item NO.	Watt	Lumen	Dimension(mm)	ССТ	Voltage	CRI	PF	Beam Angle	IP Rating
RMS-C-L2-100W	100W	10000LM±10%	380*380*150	3000K 4000K 5000K	AC100-300V, 50-60Hz		>0.9	120°	IP65
RMS-C-L2-130W	130W	13000LM \pm 10%	380*380*150			>80			
RMS-C-L2-150W	150W	15000LM \pm 10%	380*380*150						